

Patent Application Transmittal
(only for new nonprovisional applications under 37 C.F.R. 1.53(b))

Correspondence Address:
FROMMER LAWRENCE & HAUG LLP
745 FIFTH AVENUE
NEW YORK, NEW YORK 10151
TEL: (212) 588-0800
FAX: (212) 588-0500

Date: June 28, 1999

Attorney Docket No.: 450100-4940

ASSISTANT COMMISSIONER FOR PATENTS
Box Patent Application
Washington, D.C. 20231

Sir:

With reference to the filing in the United States Patent and Trademark Office
of an application for patent in the name(s) of:

Kiyonobu KOJIMA, Naoki FUJISAWA

entitled:

INFORMATION PROCESSING APPARATUS, INFORMATION PROCESSING METHOD AND STORAGE
MEDIUM

The following are enclosed:

- ☒ Specification (17 pages)
☒ 11 Sheet(s) of Drawings
☒ 9 Claim(s) (including 3 independent claim(s))
☒ This application contains a multiple dependent claim

- ☒ Our check for \$ 760.00, calculated on the basis of the claims as
amended by any enclosed preliminary amendment as follows:

Basic Fee, \$760.00 (\$380.00)	\$ 760.00
Number of Claims in excess of 20 at \$18.00 (\$9.00) each:	-0-
Number of Independent Claims in excess of 3 at \$78.00 (\$39.00) each:	-0-
Multiple Dependent Claim Fee at \$260.00 (\$130.00)	-0-
Total Filing Fee	\$ 760.00
Assignment Recording Fee \$40.00	-0-

- ☒ Oath or Declaration and Power of Attorney

☒ New ☒ signed ☒ unsigned
☒ Copy from a prior application (37 C.F.R. 1.63(d))

- ☒ Certified copy of each of the following application(s) to substantiate
the claim(s) for priority made in the Declaration:

<u>Application No.</u>	<u>Dated</u>	<u>In</u>
10-184354	30 June 1998	Japan

Please charge any additional fees required for the filing of this
application or credit any overpayment to Deposit Account No. 50-0320.

Respectfully submitted,

FROMMER LAWRENCE & HAUG LLP
Attorneys for Applicants

William S. Frommer
William S. Frommer
Reg. No. 25,506

FROMMER LAWRENCE & HAUG LLP

745 FIFTH AVENUE NEW YORK, NEW YORK 10151

WILLIAM S. FROMMER
WILLIAM F. LAWRENCE
EDGAR H. HAUG
MATTHEW K. RYAN
BARRY S. WHITE
THOMAS J. KOWALSKI
JOHN R. LANE
DENNIS M. SMID *
DANIEL G. BROWN
BARBARA Z. MORRISSEY
STEVEN M. AMUNDSON

June 28, 1999

Assistant Commissioner for Patents
Washington, D.C. 20231

Re: U.S. Patent Application
Applicants: Kiyonobu KOJIMA, Naoki FUJISAWA
Our Ref.: 450100-4940

A. THOMAS S. SAFFORD
MARILYN MATTHEW BROGAN
JEROME ROSENSTOCK
RAYMOND R. WITTEKIND, Ph.D.

Of Counsel

JAMES K. STRONSKI
GORDON KESLER
MARK W. RUSSELL *
MARC ASPERAS
BRENO POLITO
JULIE BOWKER
GRACE L. PAN *
JEFFREY A. HOVDEN
JOE H. SHALLENBURGER
CHRISTIAN M. SMOLLEZZA *
GLENN SAVIT

*Admitted to a Bar
other than New York


Dear Sir:

Enclosed are papers constituting the above patent application which is being filed under 37 C.F.R. 1.53 without a signed Declaration. Please accord a filing date and a serial number to such application and inform the undersigned thereof so that a signed Declaration and the surcharge required by 37 C.F.R. 1.16(e) may be duly filed.

Please address all correspondence to:

William S. Frommer, Esq.
FROMMER LAWRENCE & HAUG LLP
745 Fifth Avenue
New York, New York 10151

Respectfully,


William S. Frommer
Reg. No. 25,506
Attorney for Applicants
Enclosures

PATENT
450100-4940

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

APPLICATION FOR LETTERS PATENT

00340739 6620600

TITLE: INFORMATION PROCESSING APPARATUS, INFORMATION
PROCESSING METHOD AND STORAGE MEDIUM

INVENTORS: Kiyonobu KOJIMA, Naoki FUJISAWA

William S. Frommer
Registration No. 25,506
FROMMER LAWRENCE & HAUG LLP
745 Fifth Avenue
New York, New York 10151
Tel. (212) 588-0800

900705

[illegible]

06-11-73 10:29 AM

[illegible][illegible]

At the same time, graphically-driven window systems have become a standard user interface. This has shifted the status of a principal manipulative device from the keyboard to the pointing device such as a mouse or a track ball.

In that operating environment, a user utilizing a CCD camera mounted on a personal computer to get a picture of an object must first operate a pointing device to activate an image pickup application program. The user then needs to perform further operations to pick up the image.

The problem is that it takes time to operate the pointing device moving the pointer position, pushing a button or manipulating other controls when and where appropriate. The time-consuming chore often causes the user to miss a perfect moment for a good picture.

SUMMARY OF THE INVENTION

It is therefore an object of the present invention to provide an apparatus and a method for information processing allowing manipulation of a single button to operate a personal computer to pick up an image.

Other objects, features and advantages of the invention will become more apparent upon a reading of the

THE UNIVERSITY OF CHICAGO

THE UNIVERSITY OF CHICAGO

THE UNIVERSITY OF CHICAGO

THE UNIVERSITY OF CHICAGO

THE UNIVERSITY OF CHICAGO

THE UNIVERSITY OF CHICAGO

THE UNIVERSITY OF CHICAGO

[illegible]

THE UNIVERSITY OF CHICAGO

[illegible][illegible]

THE UNIVERSITY OF CHICAGO

THE UNIVERSITY OF CHICAGO

[illegible]

DESCRIPTION OF THE PREFERRED EMBODIMENTS

Figs. 1 through 6 show a typical structure of a portable personal computer 1 to which this invention is applied. The personal computer 1 is a mini-notebook type personal computer that primarily comprises a body 2 and a display part 3 attached swingingly to the body 2. Fig. 1 is a perspective view of the computer with the display part 3 swung open away from the body 2. Fig. 2 is a plan view of the computer in Fig. 1. Fig. 3 is a left-hand side view of the computer with the display part 3 swung shut onto the body 2. Fig. 4 is a right-hand side view of the computer with the display part 3 swung open 180 degrees relative to the body 2. Fig. 5 is a front view of the computer in Fig. 3. Fig. 6 is a bottom view of the computer in Fig. 4.

The face of the body 2 comprises a keyboard 4 and a track point (registered trademark) 5. The keyboard 4 is used to input characters, symbols, etc., and the track point 5 is operated to move a mouse cursor. Also furnished on the body face is a speaker 8 for sound output along with a shutter button 10 operated to take a picture using the CCD video camera 23 mounted on the display part 3.

00240720-062899

A pawl 13 is provided at the upper end of the display part 3. As shown in Fig. 3, with the display part 3 swung closed onto the body 2, the pawl 13 hooks onto a hole 6 in the body 2. At the front of the body 2 is a slide lever 7 furnished in a crosswise movable fashion. The slide lever 7 is used to lock and unlock the pawl 13 so that the pawl 13 is engaged with and disengaged from the hole 6. With the pawl 13 unlocked, the display part 3 may be swung open away from the body 2. Adjacent to the pawl 13 is a microphone 24 which, as depicted in Fig. 6, may pick up sound from both the front and the back side of the body 2.

The front of the body 2 further comprises a programmable power key (PPK) 9. An air outlet 11 is provided on the right-hand side of the body 2, as shown in Fig. 4. At the lower end in front of the body 2 is an air inlet 14 as depicted in Fig. 5. To the right of the air outlet 11 is a slot 12 that accommodates a PCMCIA (Personal Computer Memory Card International Association) card (called a PC card).

An LCD (liquid crystal display) 21 for displaying images is provided on the front of the display part 3. At the upper end of the LCD 21 is an image pickup part 22 mounted rotatably on the display part 3. More

specifically, the image pickup part 22 is rotatable to any position within a range of 180 degrees in the same direction as the LCD 21 and in the opposite direction thereof (i.e., toward the back). The image pickup part 22 is furnished with the CCD video camera 23.

At the lower end of the display part 3 on the body side is a group of lamps including a power lamp PL, a battery lamp BL, a message lamp ML and other LEDs. Reference numeral 40 in Fig. 3 denotes a power switch furnished on the left-hand side of the body 2, and reference numeral 25 in Fig. 5 represents an adjusting ring used to adjust the focus of the CCD video camera 23. Reference numeral 26 in Fig. 6 stands for a cover that conceals an opening through which to install an additional memory into the body 2, and reference numeral 41 denotes a hole through which to insert a pin to unlock the cover 26.

Fig. 7 illustrates an internal structure of the personal computer 1. As shown in Fig. 7, an internal bus 51 is connected to a CPU (central processing unit) 52, a PC card 53 inserted as needed, a RAM (random access memory) 54, and a graphic chip 81. The internal bus 51 is coupled to an external bus 55. The external bus 55, for its part, is connected to a hard disk drive (HDD) 56, an

00310739.062000

I/O (input/output) controller 57, a keyboard controller 58, a track point controller 59, a sound chip 60, an LCD controller 83, and a modem 50.

The CPU 52 is a controller that controls diverse computer functions. The PC card 53 is installed as needed when an optional function is to be added.

When the personal computer 1 is booted up, an electronic mail program (an application program) 54A, an auto pilot program (another application program) 54B and the OS (operating program) 54C are transferred from the HDD 56 to the RAM 54 and retained therein.

The electronic mail program 54A is a program that exchanges communication messages with an external entity using a communication line such as a telephone line and by way of a network. A received mail acquisition function is specifically included in the electronic mail program 54A. The received mail acquisition function checks a mail server 93 to see if a mail box 93A therein contains any mail addressed to this program (i.e., to the user). If any such mail is found in the mail box 93A, the received mail acquisition function carries out a suitable process to acquire that mail.

The auto pilot program 54B is a program that starts up and carries out a plurality of predetermined processes

(or programs) in a predetermined sequence.

The OS (operating system) 54C controls basic computer functions. A typical operating system is Windows 95 (registered trademark).

The hard disk drive (HDD) 56 connected to the external bus 55 contains the electronic mail program 56A, auto pilot program 56B, and OS (operating system) 56C. During the booting process, the OS 56C, auto pilot program 56B and electronic mail program 56A are transferred successively from the hard disk drive 56 to the RAM 54 and stored in the memory.

The I/O controller 57 has a microcontroller 61 equipped with an I/O interface 62. The microcontroller 61 is constituted by the I/O interface 62, a CPU 63, a RAM 64 and a ROM 69 which are interconnected. The RAM 64 includes a key input status register 65, an LED (light-emitting diode) control register 66, a set time register 67, and a register 68. The set time register 67 is used to start the operation of a start sequence controller 76 when a time preset by the user (i.e., starting condition) is reached. The register 68 holds a correspondence between a preset combination of operation keys (starting condition) on the one hand and an application program to be started on the other hand. When the user inputs the

0340730 050000

preset combination of operation keys, the corresponding application program (e.g., electronic mail program) is started.

When the fingertip-operated programmable power key (PPK) 9 is pushed, the key input status register 65 gets and retains an operation key flag. The LED control register 66 is used to control the illumination of the message lamp ML indicating that boot-up status of an application program (e.g., electronic mail program) which is held in the register 68. A desired time of day may be set to the set time register 67.

The microcontroller 61 is connected to a backup battery 74. The battery 74 allows contents of the registers 65, 66 and 67 to be retained when power to the body 2 is turned off.

The ROM 69 in the microcontroller 61 contains in advance a wake-up program 70, a key input monitoring program 71, and an LED control program 72. The ROM 69 is illustratively composed of an EEPROM (electrically erasable and programmable read only memory). The EEPROM is also called a flash memory. The microcontroller 61 is connected to an RTC (real-time clock) 75 that keeps the current time.

The wake-up program 70 in the ROM 69 is a program

that checks to see if a preset time in the set time register 67 is reached on the basis of time-of-day data from the RTC 75. When the preset time is reached, the wake-up program 70 starts up a predetermined process (or program). The key input monitoring program 71 continuously monitors whether the PPK 9 is pushed by the user. The LED control program 72 controls the lighting of the message lamp ML.

Furthermore, the ROM 69 contains a BIOS (basic input/output system) 73. The BIOS is a software program that controls exchanges of data (input and output) between the OS or application software on the one hand and peripheral devices (e.g., display part, keyboard, hard disk drive) on the other hand.

The keyboard controller 58 connected to the external bus 55 controls input from the keyboard 4. The track point controller 59 controls input from the track point 5.

The sound chip 60 receives input from the microphone 24, and supplies sound signals to a built-in speaker 8.

The modem 50 permits connection to a communication network 92 such as the Internet and to the mail server 93 through a public telephone line 90 and an Internet

service provider 91.

Image data captured by the CCD video camera 23 are forwarded to a processing part 82 for processing. The image data processed by the processing part 82 are input to the graphic chip 81 connected to the internal bus 51. The graphic chip 81 stores the input video data into an internal VRAM 81A, and retrieves the data from the memory as needed for output to the LCD controller 83. Given the image data from the graphic chip 81, the LCD controller 83 outputs the data to the LCD 21 for display. Back lights 84 are provided to illuminate the LCD 21 from the back.

The power switch 40 is operated to turn on and off the power supply. A half-push switch 85 is activated when the shutter button 10 is half-pushed. A full-push switch 86 is turned on when the shutter button 10 is fully pushed. A reverse switch 87 is turned on when the image pickup part 22 is rotated by 180 degrees (i.e., when the CCD video camera 23 is rotated into a direction suitable for picking up an image on the opposite side of the LCD 21).

Fig. 8 illustrates a situation where the personal computer 1 is used to pick up an image of an object. The user of the personal computer 1 rotates the image pickup

part 22 at the upper end of the display part 3 in the opposite direction of the LCD 21 so as to take a picture of the object in front of the user.

Fig. 9 shows a display on the LCD 21 in effect before the shutter button 10 is pushed. A window 111 of the image pickup application program appears behind a window 112 of a spreadsheet application program and a window 113 of a word processor application program.

Fig. 10 depicts a display on the LCD 21 in effect when the shutter button 10 is half-pushed. Half-pushing the shutter button 10 activates the window 111 of the image pickup application program without clicking on the window 111 using a pointer 114. The window 111 now appears in the foreground in front of the window 112 of the spreadsheet application program and the window 113 of the word processor application program. An image displayed in the window 111 of the image pickup application program is held still even if the personal computer 1 is altered in its orientation. In this state, fully pushing the shutter button 10 stores onto the HDD 56 the image in the window 111 of the image pickup application program, the storage being made in a suitable format.

Releasing the half-pushed shutter button 10 causes

the image pickup application program to set free the image from its motionless state in the window 111.

Fig. 11 is a flowchart of steps constituting a process of picking up a still image. In step S11, the CPU 52 checks to see if the shutter button 10 is half-pushed on the basis of the input from the half-push switch 85. If the shutter button 10 is judged to be half-pushed, step S12 is reached. In step S12, the CPU 52 activates a window of a still image pickup application program, causing the window to appear in front of the windows of all other application programs. In step S13, the CPU 52 holds still the image (captured through the CCD video camera 23) displayed in the window of the still image pickup application program.

In step S14, the CPU 52 checks to see if the shutter button 10 is released on the basis of the input from the half-push switch 85. If the shutter button 10 is not judged to be released, step S15 is reached. In step S15, the CPU 52 checks to see if the shutter button 10 is fully pushed on the basis of the input from the full-push switch 86. If the shutter button 10 is judged to be fully pushed, step S16 is reached. In step S16, the image in the window of the still image pickup application program is stored onto the HDD 56 in an appropriate format. This

terminates the process of still image pickup.

If the shutter button 10 is not judged to be fully pushed in step S15, step S14 is reached again. The operative state of the shutter button 10 is then continuously monitored for judgment.

If the shutter button 10 is not judged to be half-pushed in step S11 or if the shutter button 10 is judged to be released in step S14, then the still image pickup process is terminated.

As described above, the user is able to pick up a still image of the object by operating the shutter button 10 alone.

A process of picking up a motion image will now be described. Fig. 12 is a flowchart of steps constituting the motion image pickup process. In step S21, the CPU 52 checks to see if the shutter button 10 is half-pushed on the basis of the input from the half-push switch 85. If the shutter button 10 is judged to be half-pushed, step S22 is reached. In step S22, a window of a motion image pickup application program is activated and made to appear in front of the windows of all other application programs.

In step S23, the CPU 52 checks to see if the shutter button 10 is released on the basis of the input

00310720 000000

from the half-push switch 85. If the shutter button 10 is not judged to be released, step S24 is reached. In step S24, the CPU 52 checks to see if the shutter button 10 is fully pushed on the basis of the input from the full-push switch 86. If the shutter button 10 is judged to be fully pushed, step S25 is reached. In step S25, the CPU 52 checks to see if a motion image is being picked up. If it is judged that no motion image is being picked up in step S25, step S26 is reached. In step S26, a motion image starts to be picked up, and the process is terminated. If a motion image pickup is judged to be in progress in step S25, step S27 is reached in which the motion image pickup is stopped and the process is terminated.

If the shutter button 10 is not judged to be fully pushed in step S24, step S23 is reached again. The operative state of the shutter button 10 is then continuously monitored for judgment.

If the shutter button 10 is not judged to be half-pushed in step S21 or if the shutter button 10 is judged to be released in step S23, then the motion image pickup process is terminated.

As described, the user is able to carry out or stop the motion image pickup by operating the shutter button 10 alone.

Because the shutter button 10 alone needs to be operated for picking up still and motion images, the user will not likely miss a perfect moment for a good picture.

In the description above, the still image pickup application program or the motion image pickup application program was assumed to be already running. Alternatively, any one of these programs may be booted and executed the moment the shutter button 10 is half-pushed.

Computer programs designed to perform the above-described processes may be retained on such storage media as magnetic disks, CD-ROMs, or solid state memories when offered to users. The programs may also be distributed by use of such communication media as networks and satellites.

Through the use of the inventive information processing apparatus, information processing method and storage medium, the image pickup application program is activated when an image of an object is picked up and the user's suitable operations are detected. Only the shutter button needs to be operated for picking up still and motion images.

As many apparently different embodiments of this invention may be made without departing from the spirit

and scope thereof, it is to be understood that the invention is not limited to the specific embodiments thereof except as defined in the appended claims.

00240729 00000000

WHAT IS CLAIMED IS:

1. An information processing apparatus which has a graphic user interface adopting windows and which is capable of selecting and operating any of a plurality of application programs, said information processing apparatus comprising:

image pickup means for picking up an image of an object;

detecting means for detecting operations performed by a user; and

controlling means for controlling an application program so that said application program is activated to pick up said image when said detecting means detects operations.

2. An information processing apparatus according to claim 1, wherein said detecting means detects a first and a second operation performed by said user; and

wherein said controlling means activates a window for said application program for picking up said image if said detecting means detects said first operation, said controlling means further causing said image pickup means to pick up said image when said detecting means detects said second operation.

3. An information processing apparatus according

to claim 2, wherein said first operation is a half-push button operation and said second operation is a full-push button operation.

4. An information processing method for use with a graphic user interface adopting windows and capable of selecting and operating any of a plurality of application programs, said information processing method comprising the steps of:

- picking up an image of an object;
- detecting operations performed by a user; and
- controlling an application program so that said application program is activated to pick up said image when operations are detected in said detecting step.

5. An information processing method according to claim 4, wherein said detecting step detects a first and a second operation performed by said user; and

wherein said controlling step activates a window for said application program for picking up said image if said detecting step detects said first operation, said controlling step further causing said image pickup step to pick up said image when said detecting step detects said second operation.

6. An information processing method according to claim 5, wherein said first operation is a half-push

button operation and said second operation is a full-push button operation.

7. A storage medium for storing a program in a manner readable by an information processing apparatus which has a graphic user interface adopting windows and which is capable of selecting and operating any of a plurality of application programs, said program allowing said information processing apparatus to execute an information processing method comprising the steps of:

picking up an image of an object;

detecting operations performed by a user; and

controlling an application program so that said application program is activated to pick up said image when operations are detected in said detecting step.

8. A storage medium according to claim 7, wherein said detecting step detects a first and a second operation performed by said user; and

wherein said controlling step activates a window for said application program for picking up said image if said detecting step detects said first operation, said controlling step further causing said image pickup step to pick up said image when said detecting step detects said second operation.

9. A storage medium according to claim 8, wherein

said first operation is a half-push button operation and
said second operation is a full-push button operation.

09240729.052009

ABSTRACT OF THE DISCLOSURE

The invention relates to an apparatus and a method for information processing allowing a personal computer to pick up an image through operation of a single button. When a half-push switch is turned on, a CPU activates a window of an image pickup application program, causing the window to appear in front of the windows of all other application programs. An image displayed in the window of the image pickup application program is held still even if a personal computer is altered in its orientation. When a full-push switch is turned on, the image in the window of the image pickup application program is stored onto an HDD in a suitable format.

FIG. 1

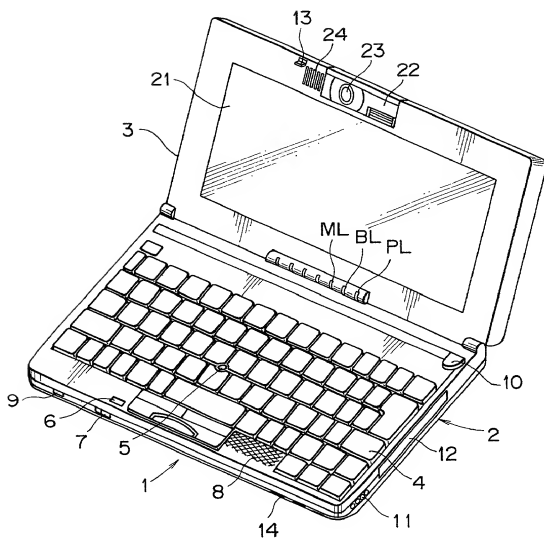


FIG. 2

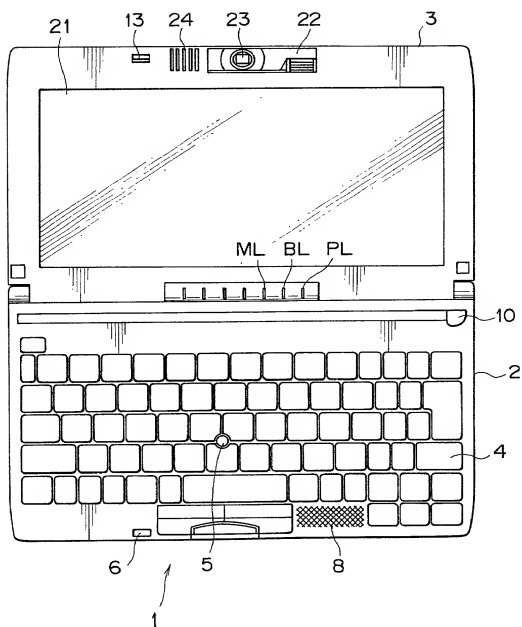


FIG. 3

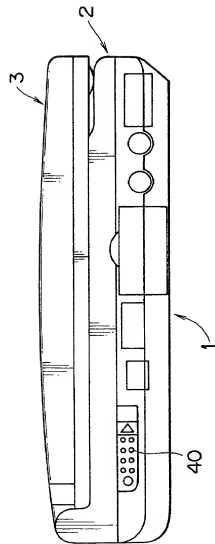


FIG. 4




FIG. 5

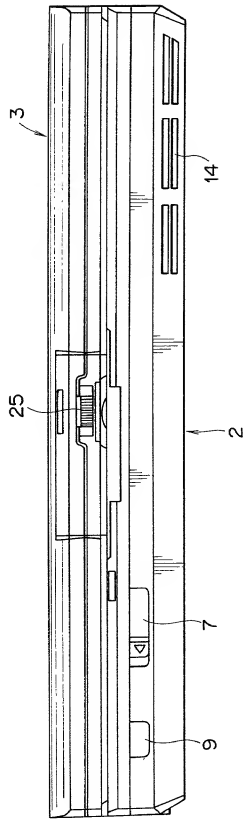
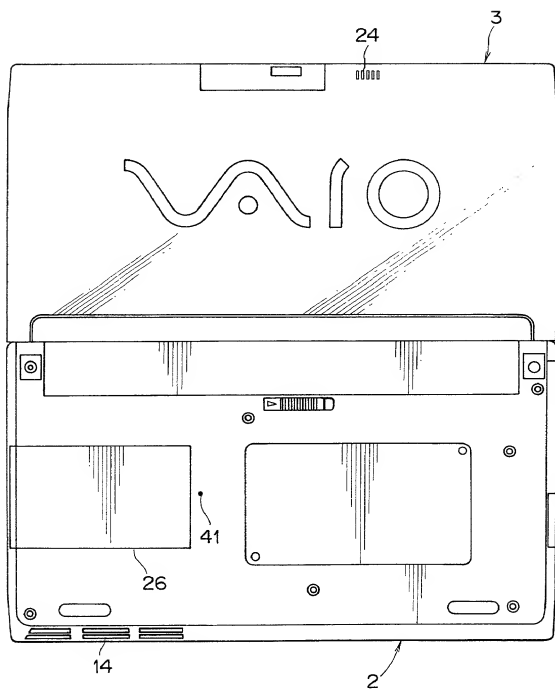


FIG. 6



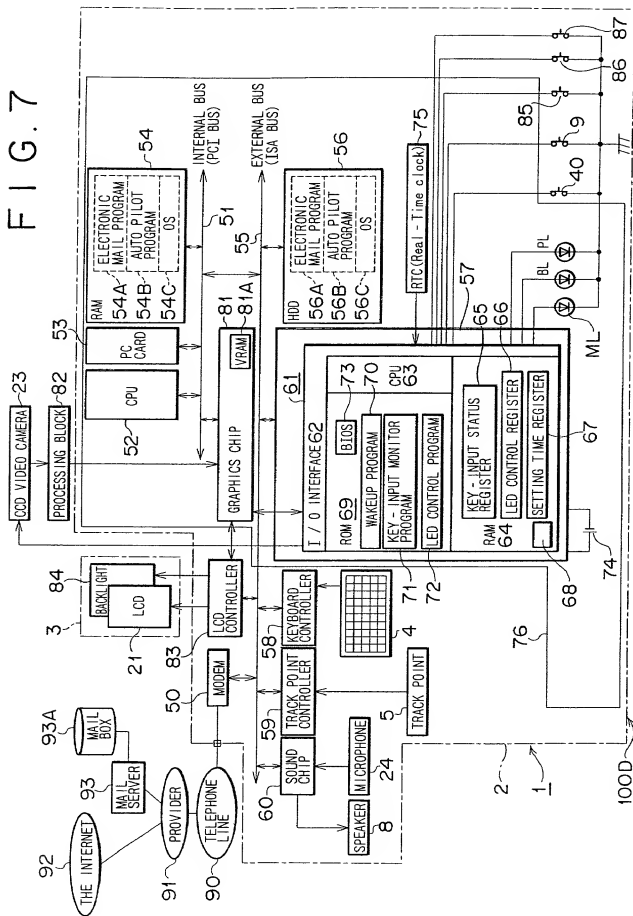


FIG. 8

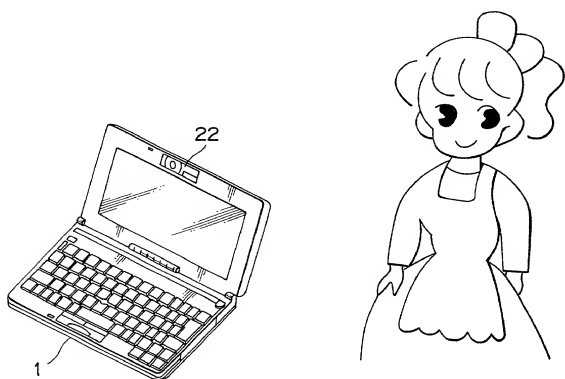


FIG. 9

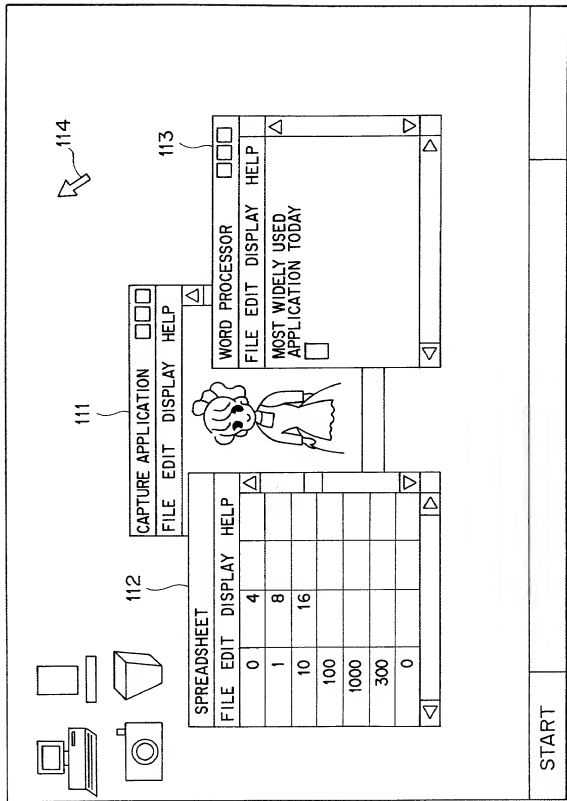


FIG. 10


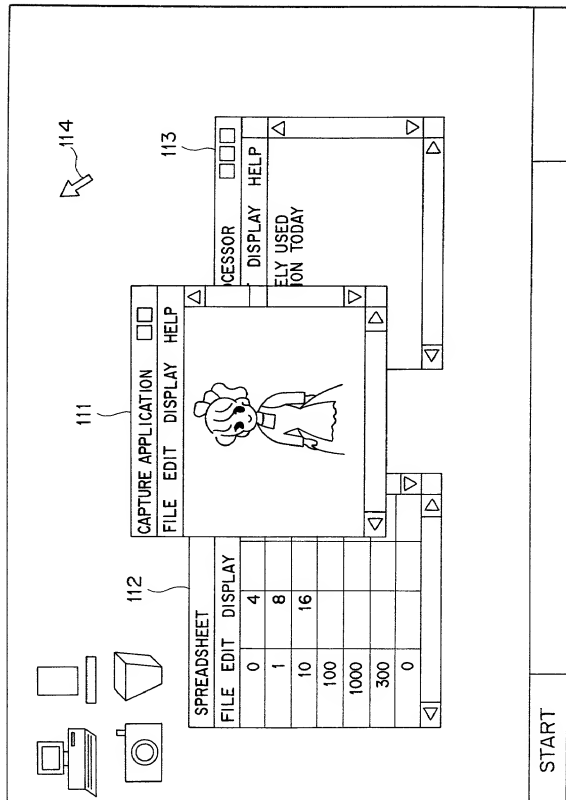


FIG. 11

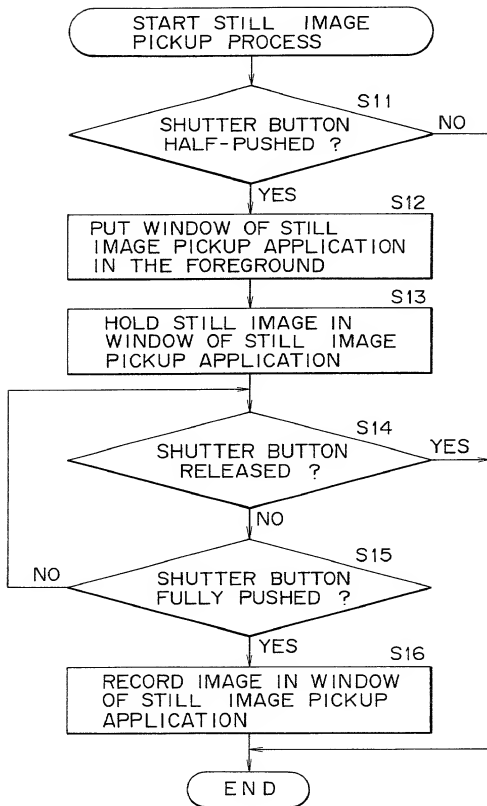

DECLARATION FOR PATENT APPLICATION (JOINT OR SOLE)

(Under 37 CFR § 1.63; with Power of Attorney)

FROMMER LAWRENCE & HAUG LLP

FLH File No. 450100-4940

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name,

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention ENTITLED:

INFORMATION PROCESSING APPARATUS, INFORMATION PROCESSING METHOD AND STORAGE MEDIUM

the specification of which

 X is attached hereto.

 was filed on as Application Serial No. ,

with amendment(s) through (if applicable, give dates).

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose to the United States Patent and Trademark Office all information known to me to be material to patentability as defined in Title 37, Code of Federal Regulations, Sec. 1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, § 119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

<u>Prior Foreign Application(s)</u>	<u>(list additional applications on separate page)</u>	<u>Priority Claimed:</u>		
<u>Number:</u>	<u>Country:</u>	<u>Filed (Day/Month/Year):</u>	<u>Yes</u>	<u>No</u>
10-184354	Japan	30 June 1998	X	

I hereby claim the benefit under Title 35, United States Code, § 120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code § 112, I acknowledge the duty to disclose to the United States Patent and Trademark Office all information known to me to be material to patentability as defined in Title 37, Code of Federal Regulations, Sec. 1.56, which became available between the filing date of the prior application and the national or PCT international filing date of this application:

<u>Prior U.S. Application(s)</u>	<u>(list additional applications on separate page)</u>	<u>Status (patented, pending, abandoned):</u>
<u>App'n. Ser. Number:</u>	<u>Filed (Day/Month/Year):</u>	

I hereby appoint WILLIAM S. FROMMER, Registration No. 25,506, and DENNIS M. SMID, Registration No. 34,930 or their duly appointed associate, my attorneys, with full power of substitution and revocation, to prosecute this application, to make alterations and amendments therein, to file continuation and divisional applications thereof, to receive the Patent, and to transact all business in the Patent and Trademark Office and in the Courts in connection therewith, and specify that all communications about the application are to be directed to the following correspondence address:

WILLIAM S. FROMMER, Esq.
c/o FROMMER LAWRENCE & HAUG LLP
745 Fifth Avenue
New York, New York 10151

Direct all telephone calls to:
(212) 588-0800
to the attention of:
WILLIAM S. FROMMER

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

INVENTOR(S):

Signature: _____ Date: _____

Full name of sole or first inventor: Kiyonobu KOJIMA
Residence: Kanagawa, Japan
Citizenship: Japan

Signature: _____ Date: _____

Full name of 2nd joint inventor (if any): Naoki FUJISAWA
Residence: Kanagawa, Japan
Citizenship: Japan

Post Office Address(es) of inventor(s): (if all inventors have the same post office address)	Sony Corporation 7-35 Kashiwanagawa 6-chome Shinagawa-Ku, Tokyo 141, Japan
---	--

Note: In order to qualify for reduced fees available to Small Entities, each inventor and any other individual or entity having rights to the invention must also sign an appropriate separate "Verified Statement (Declaration) Claiming [or Supporting a Claim by Another for] Small Entity Status" form [e.g. for Independent Inventor, Small Business Concern, Nonprofit Organization, Individual Non-Inventor].

Note: A post office address must be provided for each inventor.